

Rittal – The System.

Faster – better – everywhere.

Door-operated switch – SZ 4315.350

Date : Jun 19, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Door-operated switch – SZ 4315.350

created: 19.06.2017 build on www.rittal.com/il-en

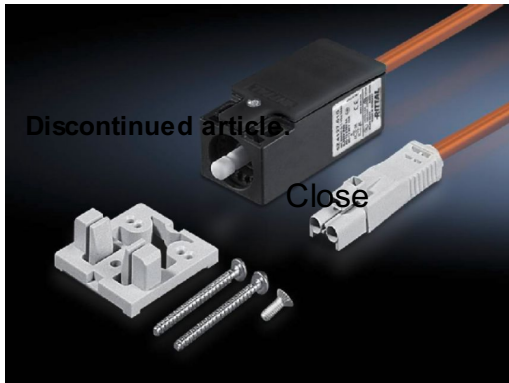

Product description

Design: With connection cable

Product features

Dimensions: Length: 1000 mm

Rated operating voltage: 400 V

Installation options: for standard and courtesy light without integral door-operated switch

Technical specifications: 240 V AC, 6 A

Equipment (electrical): Colour of cable: Grey

Rated insulation voltage: 400 V AC

Rated impulse withstand voltage, phase to phase: 6000 V AC

Packs of: 1 pc(s).

Weight/pack: 0.15 kg

EAN: 4028177501478

Customs tariff 85444290

number:

ETIM 6.0: EC002626

ETIM 5.0: EC002626

eCl@ss 8.0/8.1: 27189266

eCl@ss 7.0/7.1: 27119116

eCl@ss 6.0/6.1: 27119116

eCl@ss 5.1/5.1.4: 27189241

Product description (long): SZ Door-operated switch, with connection wire, L: 1000 mm, grey, UL

Approvals

Approvals: CCC
CSA
UR

Certificates: EAC

Declarations: Declaration of conformity

2017 © Rittal Enclosure Systems Ltd.