Rittal – The System.

Faster – better – everywhere.

Fibre-optic splicing box, depth-variable – DK 7241.005

Date : Jun 19, 2017

ENCLOSURES POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES

RITTAL

FRIEDHELM LOH GROUP

Fibre-optic splicing box, depth-variable – DK 7241.005

created: 19.06.2017 on www.rittal.com/com-en

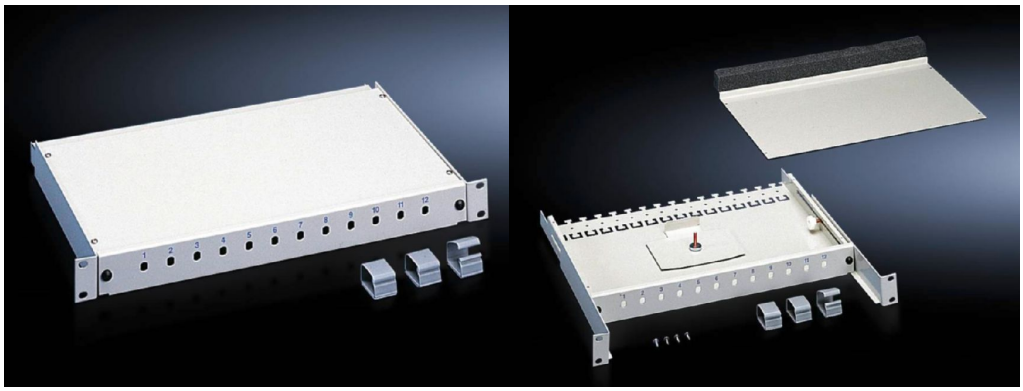

Product description

Description:	The 482.6 mm (19") splicing box is designed to accommodate splicing cassettes and can be installed in any network distributor with 482.6 mm (19") accommodation and used as a fibre-optic termination or distributor. The variable cassette fixture permits twist-proof installation of all standard splicing cassettes. The rear section of the splicing box is completely open for cable entry; a rubber cable clamp strip provides protection against dust. The fibre-optic cables can be secured with cable ties or cable clamps. The splicing box is infinitely depth-adjustable up to 100 mm within the 482.6 mm (19") flanges. In addition, the splicing box may be fully withdrawn from the 482.6 mm (19") flanges. Two strain relief clips and cable routing clips for the fibre stock provide a solution to suit any fibre-optic wiring system.
Material:	Sheet steel
Colour:	RAL 7035
Supply includes:	Splicing box Cable routing clips Cassette cover Mounting accessories for patch panel
Note:	Supplied without patch panels and splicing cassettes.

Product features

Units:	1 U
Installation dimensions:	Installation depth: 302 mm
Number of splicing cassettes (max.):	2
Packs of:	1 pc(s).

© Rittal 2017

Weight/pack:	3.36 kg
EAN:	4028177167049
Customs tariff number:	94032080
ETIM 6.0:	EC001130
ETIM 5.0:	EC001130
eCl@ss 8.0/8.1:	19170113
eCl@ss 7.0/7.1:	19170112
eCl@ss 6.0/6.1:	19170107
eCl@ss 5.1/5.1.4:	27180203
Product description (long):	DK Fibre-optic splicing box, 1 U, For D: 302 mm, without pull-out, depth-variable

2017 © Rittal GmbH & Co. KG