

Rittal – The System.

Faster – better – everywhere.

▶ PE/PEN combination angle E-Cu for PE/PEN combinations – SV 9661.240

Date : Jun 20, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



PE/PEN combination angle E-Cu for PE/PEN combinations – SV 9661.240

created: 20.06.2017 on www.rittal.com/com-en

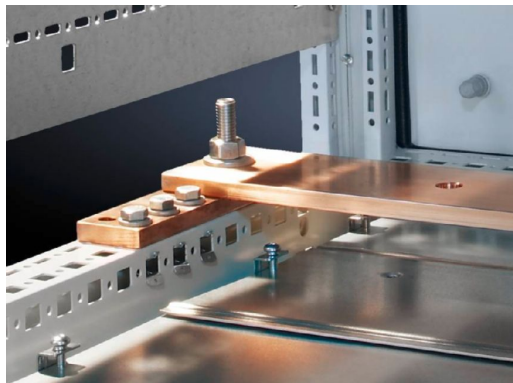

Product description

Description:	The PE/PEN combination, comprising busbars, combination angles and baying brackets, supports type-tested configurations as per IEC 61 439-1.
Benefits:	Thanks to the pre-assembled combination angles, baying brackets and busbars customised to match the enclosure width, assembly is time-saving with cost reduction
Applications:	Form 2-4
Material:	E-Cu
Supply includes:	Assembly parts

Product features

To fit busbars:	Busbar type: Busbar E-Cu with integral punchings with cross-section width: 40 mm with cross-section width: 80 mm with cross-section height: 10 mm with cross-section height: 10 mm
Cross-section:	Cross-section per bracket (width): 40 mm Cross-section per bracket (thickness): 10 mm
Tested short-circuit resistance:	lcw 60 kA, 1 sec.
Packs of:	4 pc(s).

Weight/pack:	2.36 kg
EAN:	4028177555808
Customs tariff number:	74199990
ETIM 6.0:	EC000329
ETIM 5.0:	EC000329
eCl@ss 8.0/8.1:	27400605
eCl@ss 7.0/7.1:	27400605
eCl@ss 6.0/6.1:	27400605
eCl@ss 5.1/5.1.4:	27189215
Product description (long):	SV PE/PEN combination angle E-Cu, WH: 40x10 mm, L: 135 mm

2017 © Rittal GmbH & Co. KG