

Rittal – The System.

Faster – better – everywhere.

► **Slide rails, depth-variable, 1 U for server and network enclosures with two 482.6 mm (19") mounting levels and TE, L-shaped mounting angles – DK 7063.883**

Date : Jun 19, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Slide rails, depth-variable, 1 U for server and network enclosures with two 482.6 mm (19") mounting levels and TE, L-shaped mounting angles – DK 7063.883

created: 19.06.2017 build on www.rittal.com/il-en

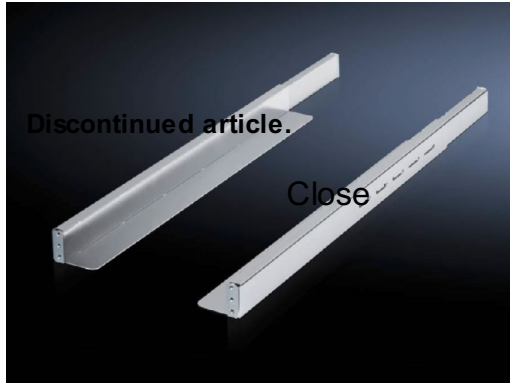

Product description

Description: The slide rail is pulled out to the required length and secured between the front and rear mounting level. Rear location lugs and front screw-fastening enable convenient one-man assembly. The mounting component to be integrated is inserted horizontally onto the slide rail and optionally secured to the mounting level via its attachment slots.

Material: Sheet steel

Surface finish: Zinc-plated

Supply includes: Assembly parts

Note: The super-slimline design of the slide rail allows it to be used in most integration cases for 482.6 mm (19") mounting components. Because it is secured to the standardised mounting level, it is manufacturer-independent. The slide rail slightly reduces the installation space below the slide rail so that the U below it is only available for limited use.

Product features

To fit: Enclosure type: TE 7000

Length: 590 mm - 930 mm

Length (min.): 590 mm

Length (max.): 930 mm

Contact surface:	Width: 50 mm
Load capacity:	static (max.): 80 kg
Packs of:	2 pc(s).
Weight/pack:	1.82 kg
EAN:	4028177517783
Customs tariff number:	73269098
ETIM 6.0:	EC002620
ETIM 5.0:	EC002620
eCl@ss 8.0/8.1:	27189261
eCl@ss 7.0/7.1:	27182590
eCl@ss 6.0/6.1:	27182590
eCl@ss 5.1/5.1.4:	27182504

2017 © Rittal Enclosure Systems Ltd.